

October 12, 1995
Software Version 1.0

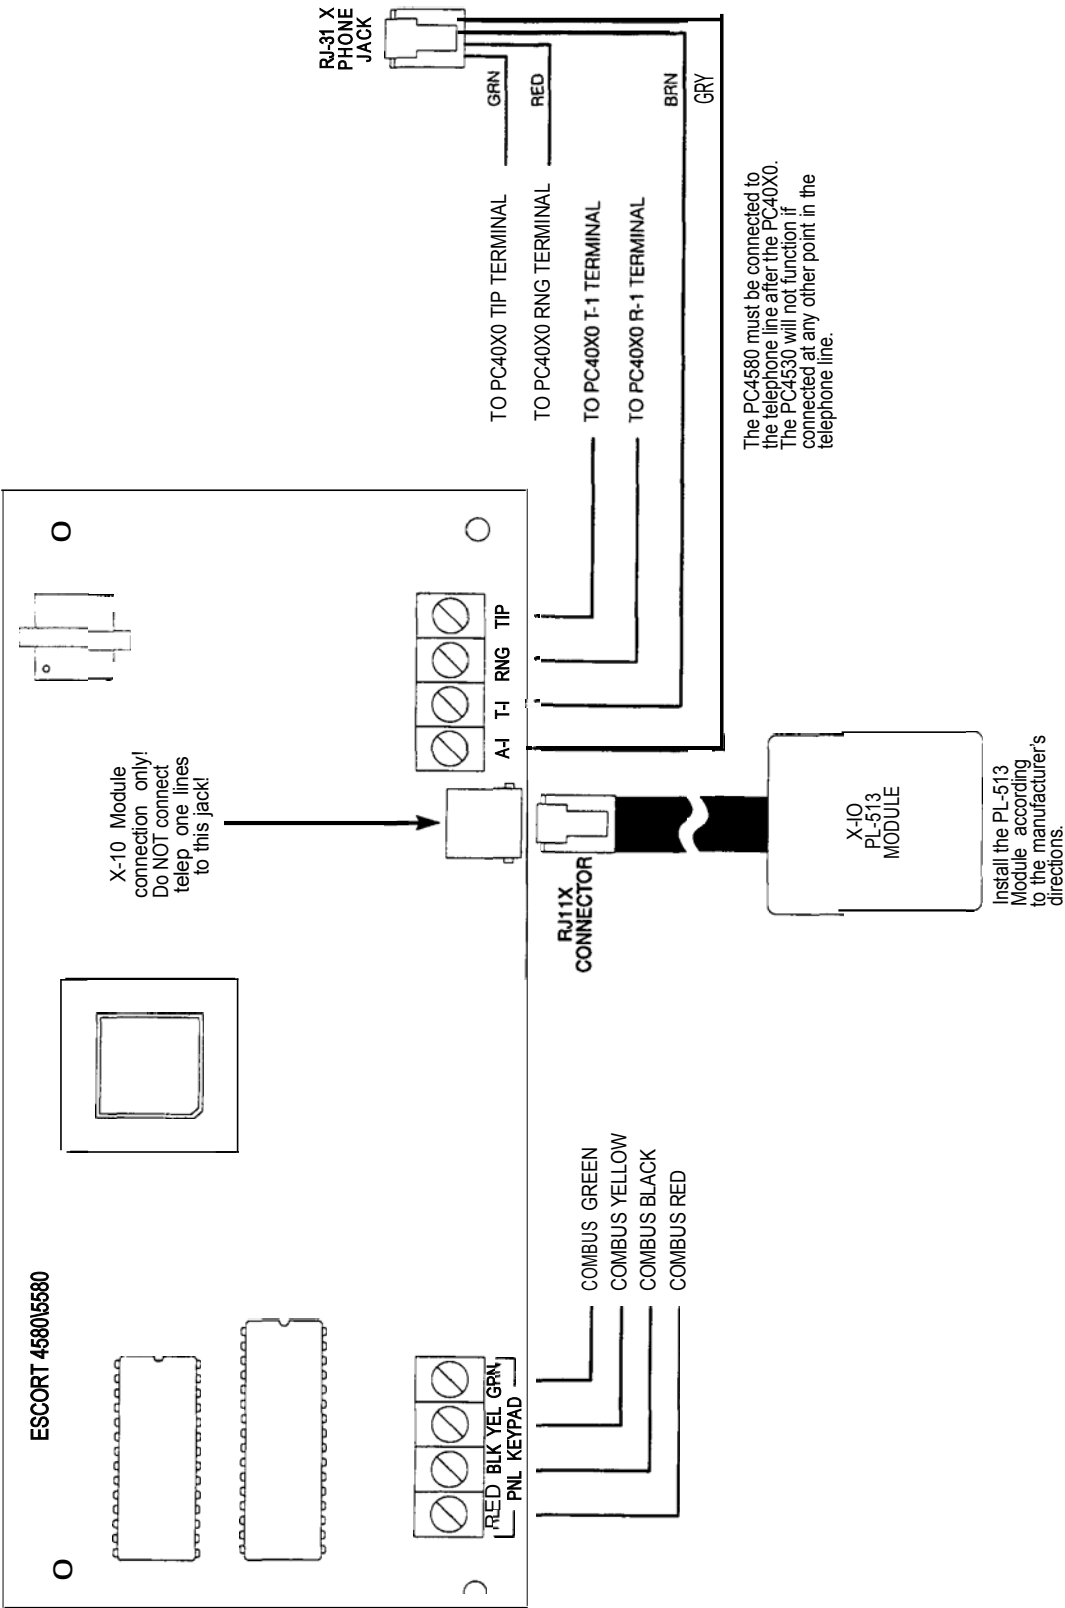
PROGRAMMING WORK SHEETS



Table of Contents

Hook-Up Diagram	ii
System Programming	1
Telephone Access Programming	2
Automation Schedules	3
Automation Items	7
Automation Item Pulse Timers	39
Label Programming	40
Appendix 1: X-10 House Code and Unit Numbers	56
Appendix 2: Word Library	57
For The Record	58

Hook-Up Diagram



System Programming

001 Service Code

Default

4 5 8 0

002 First System Option Code

Default

OFF

Option

ON

OFF

OFF

01

Home Automation enabled

Home Automation disabled

02

[*][5] requires an Access Code

[*][5] does not require an Access Code

003 Status Prompt Day Mask

Default

ON

Option

ON

OFF

ON

01

"Warning Bypass On" prompt enabled

Disabled

ON

02

"System Open Zone X" prompt enabled

Disabled

ON

03

"Alarms in Memory" prompt enabled

Disabled

ON

04

"AC Trouble" prompt enabled

Disabled

ON

05

"Phone Line Trouble" prompt enabled

Disabled

ON

06

"Low Battery on Zone X" prompt enabled

Disabled

ON

07

"Loss of Clock Trouble" prompt enabled

Disabled

ON

08

"System Fault, Service Required" prompt enabled

Disabled

ON

09

"For More Options, Press Star" prompt enabled

Disabled

ON

10

"System On Without Entry" prompt enabled

Disabled

ON

11

"Automation Service Required" prompt enabled

Disabled

ON

12

"Zone Tamper" prompt enabled

Disabled

ON

13

"Zone Fault" prompt enabled

Disabled

004 [*] Function Prompt Day Mask

Default

ON

Option

ON

OFF

ON

01

"For Zone Bypassing" prompt enabled

Disabled

ON

02

"For Alarm Memory" prompt enabled

Disabled

ON

03

"For Sensor Reset" prompt enabled

Disabled

ON

04

"For Automatic Control" prompt enabled

Disabled

ON

05

"For Special Functions" prompt enabled

Disabled

ON

06

"For Door Strike" prompt enabled

Disabled

ON

07

"For Arming Without Entry" prompt enabled

Disabled

ON

08

"For Quick Arming" prompt enabled

Disabled

ON

09

"For Quick Exit" prompt enabled

Disabled

ON

10

"To Arm Interior Zones" prompt enabled

Disabled

005 Local Programming Lockout Counter

Default

0 0 0

006 Local Programming Lockout Duration

Default

0 0 0

007 Number of Home Automation Transmissions

Default

0 0 1

Valid entries are 001 to 255

Section 07 is not supported by the DLS-1 v5.6 or earlier Downloading Software.

Telephone Access Programming

020 Local and Remote Telephone Access Code

Default

Enter a 3-digit code using the numbers 0 through 9, and the signs [#] and [*]. *Avoid Codes that coincide with local telephone company 3-digit telephone numbers and services.*

021 Telephone Access Options

Default

Option

ON

OFF

01

Remote Access Enabled

Remote Access Disabled

02

PC40XX code req'd for Local Access

No code req'd for Partition Access

Automation Schedules

030 Schedule 1 ON Time

Default

9 9 9 9

031 Schedule 1 OFF Time

Default

9 9 9 9

032 Schedule 1 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON

Option	ON	OFF
01	Sunday ON	Sunday OFF
02	Monday ON	Monday OFF
03	Tuesday ON	Tuesday OFF
04	Wednesday ON	Wednesday OFF
05	Thursday ON	Thursday OFF
06	Friday ON	Friday OFF
07	Saturday ON	Saturday OFF

033 Schedule 2 ON Time

Default

9 9 9 9

034 Schedule 2 OFF Time

Default

9 9 9 9

035 Schedule 2 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON

036 Schedule 3 ON Time

Default

9 9 9 9

037 Schedule 3 OFF Time

Default

9 9 9 9

038 Schedule 3 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON

039 Schedule 4 ON Time

Default

9 9 9 9

040 Schedule 4 OFF Time

Default

9 9 9 9

041 Schedule 4 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

042 Schedule 5 ON Time

Default

043 Schedule 5 OFF Time

Default

044 Schedule 5 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

045 Schedule 6 ON Time

Default

046 Schedule 6 OFF Time

Default

047 Schedule 6 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

048 Schedule 7 ON Time

Default

049 Schedule 7 OFF Time

Default

050 Schedule 7 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

051 Schedule 8 ON Time

Default

052 Schedule 8 OFF Time

Default

053 Schedule 8 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

054 Schedule 9 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

055 Schedule 9 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

056 Schedule 9 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

057 Schedule 10 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

058 Schedule 10 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

059 Schedule 10 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

060 Schedule 11 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

061 Schedule 11 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

062 Schedule 11 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

063 Schedule 12 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

064 Schedule 12 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

065 Schedule 12 Day Mask

	01	02	03	04	05	06	07							
Defaults	ON	ON	ON	ON	ON	ON	ON							
	<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>		<table border="1"><tr><td></td></tr></table>	

066 Schedule 13 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

067 Schedule 13 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

068 Schedule 13 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

069 Schedule 14 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

070 Schedule 14 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

071 Schedule 14 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

072 Schedule 15 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

073 Schedule 15 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

074 Schedule 15 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

075 Schedule 16 ON Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

076 Schedule 16 OFF Time

Default

9	9	9	9				
---	---	---	---	--	--	--	--

077 Schedule 16 Day Mask

	01	02	03	04	05	06	07
Defaults	ON	ON	ON	ON	ON	ON	ON
	☐	☐	☐	☐	☐	☐	☐

Automation Items

130 Automation Item 1: House Code and Unit Number

Default

0 0 0

131 Automation Item 1: Miscellaneous Options

Default Option ON

OFF		01	Automation Item enabled	OFF	Automation Item disabled
ON		02	User Controlled ON/OFF		Not user controlled
OFF		03	Included in Global ON/OFF Command		Not included in Global ON/OFF Command
OFF		04	Dimming Enabled		Dimming Disabled
OFF		05	Follows Schedule ON/OFF Output Condition Always		Follows Schedule ON/OFF Output Condition only when Mode is ON
ON		06	Item is ON steady when active		Item activates for programmed time
ON		07	Item prompt: "ON/OFF"		Prompt is not "ON/OFF"
OFF		08	Item prompt: "OPEN/CLOSED"		Prompt is not "OPEN/CLOSED"
OFF		09	Item prompt: "Setback ON/Setback OFF"		Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

132 Automation Item 1: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

133 Automation Item 1: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

134 Automation Item 1: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option Operation

- 00 Manual user control only
- 01 Alarm System Output Only
- 02 Schedule Only
- 03 Schedule **or** Alarm System Output
- 04 Schedule **and** Alarm System Output

135 Automation Item 2: House Code and Unit Number

Default

0 0 0

136 Automation Item 2: Miscellaneous Options

Default	Option	ON	OFF
<u>OFF</u> <u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u> <u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u> <u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u> <u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u> <u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u> <u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u> <u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u> <u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u> <u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

137 Automation Item 2: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

138 Automation Item 2: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

139 Automation Item 2: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

140 Automation Item 3: House Code and Unit Number

Default

0 0 0

141 Automation Item 3: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

142 Automation Item 3: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

143 Automation Item 3: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

144 Automation Item 3: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

145 Automation Item 4: House Code and Unit Number

Default

0 0 0

146 Automation Item 4: Miscellaneous Options

Default	Option	ON	OFF
OFF	01	Automation Item enabled	Automation Item disabled
ON	02	User Controlled ON/OFF	Not user controlled
OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF	04	Dimming Enabled	Dimming Disabled
OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON	06	Item is ON steady when active	Item activates for programmed time
ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

147 Automation Item 4: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

148 Automation Item 4: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

149 Automation Item 4: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

150 Automation Item 5: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

151 Automation Item 5: Miscellaneous Options

Default		Option	ON	OFF
OFF		01	Automation Item enabled	Automation Item disabled
ON		02	User Controlled ON/OFF	Not user controlled
OFF		03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF		04	Dimming Enabled	Dimming Disabled
OFF		05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON		06	Item is ON steady when active	Item activates for programmed time
ON		07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF		08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF		09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**152 Automation Item 5: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF																
	<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>	

153 Automation Item 5: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8								
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF								
	<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>	

154 Automation Item 5: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

155 Automation Item 6: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

156 Automation Item 6: Miscellaneous Options

Default		Option	ON	OFF
OFF		01	Automation Item enabled	Automation Item disabled
ON		02	User Controlled ON/OFF	Not user controlled
OFF		03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF		04	Dimming Enabled	Dimming Disabled
OFF		05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON		06	Item is ON steady when active	Item activates for programmed time
ON		07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF		08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF		09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**157 Automation Item 6: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16																
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF																
	<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>		<table><tr><td></td></tr></table>	

158 Automation Item 6: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

159 Automation Item 6: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

160 Automation Item 7: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

161 Automation Item 7: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	☐	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	☐	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	☐	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	☐	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**162 Automation Item 7: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

163 Automation Item 7: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

164 Automation Item 7: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

165 Automation Item 8: House Code and Unit Number

Default

0 0 0

166 Automation Item 8: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

167 Automation Item 8: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

168 Automation Item 8: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

169 Automation Item 8: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

170 Automation Item 9: House Code and Unit Number

Default

0 0 0 **171 Automation Item 9: Miscellaneous Options**

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**172 Automation Item 9: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

173 Automation Item 9: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

174 Automation Item 9: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

175 Automation Item 10: House Code and Unit Number

Default

0 0 0

176 Automation Item 10: Miscellaneous Options

Default	Option	ON	OFF
☐ OFF	01	Automation Item enabled	Automation Item disabled
☐ ON	02	User Controlled ON/OFF	Not user controlled
☐ OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	04	Dimming Enabled	Dimming Disabled
☐ OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	06	Item is ON steady when active	Item activates for programmed time
☐ ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

177 Automation Item 10: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

178 Automation Item 10: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

179 Automation Item 10: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

180 Automation Item 11: House Code and Unit Number

Default

0 0 0

181 Automation Item 11: Miscellaneous Options

Default	Option	ON	OFF
☐ OFF	01	Automation Item enabled	Automation Item disabled
☐ ON	02	User Controlled ON/OFF	Not user controlled
☐ OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	04	Dimming Enabled	Dimming Disabled
☐ OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	06	Item is ON steady when active	Item activates for programmed time
☐ ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

182 Automation Item 11: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

183 Automation Item 11: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

184 Automation Item 11: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

185 Automation Item 12: House Code and Unit Number

Default

0 0 0

186 Automation Item 12: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

187 Automation Item 12: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

188 Automation Item 12: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

189 Automation Item 12: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

190 Automation Item 13: House Code and Unit Number

Default

0 0 0 _ _ _

191 Automation Item 13: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	☐	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	☐	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	☐	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	☐	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

192 Automation Item 13: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

193 Automation Item 13: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

194 Automation Item 13: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

195 Automation Item 14: House Code and Unit Number

Default

0 0 0 **196 Automation Item 14: Miscellaneous Options**

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**197 Automation Item 14: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

198 Automation Item 14: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

199 Automation Item 14: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

200 Automation Item 15: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

201 Automation Item 15: Miscellaneous Options

Default		Option	ON	OFF
OFF		01	Automation Item enabled	Automation Item disabled
ON		02	User Controlled ON/OFF	Not user controlled
OFF		03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF		04	Dimming Enabled	Dimming Disabled
OFF		05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON		06	Item is ON steady when active	Item activates for programmed time
ON		07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF		08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF		09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**202 Automation Item 15: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

203 Automation Item 15: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

204 Automation Item 15: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

205 Automation Item 16: House Code and Unit Number

Default

0 0 0 _ _ _

206 Automation Item 16: Miscellaneous Options

Default		Option	ON	OFF
OFF	☐	01	Automation Item enabled	Automation Item disabled
ON	☐	02	User Controlled ON/OFF	Not user controlled
OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF	☐	04	Dimming Enabled	Dimming Disabled
OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON	☐	06	Item is ON steady when active	Item activates for programmed time
ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

207 Automation Item 16: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

208 Automation Item 16: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

209 Automation Item 16: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

210 Automation Item 17: House Code and Unit Number

Default

0 0 0 _ _ _

211 Automation Item 17: Miscellaneous Options

Default		Option	ON	OFF
OFF	☐	01	Automation Item enabled	Automation Item disabled
ON	☐	02	User Controlled ON/OFF	Not user controlled
OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF	☐	04	Dimming Enabled	Dimming Disabled
OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON	☐	06	Item is ON steady when active	Item activates for programmed time
ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

212 Automation Item 17: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

213 Automation Item 17: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

214 Automation Item 17: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

215 Automation Item 18: House Code and Unit Number

Default

0 0 0 _ _ _

216 Automation Item 18: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	☐	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	☐	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	☐	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	☐	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

217 Automation Item 18: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

218 Automation Item 18: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

219 Automation Item 18: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

220 Automation Item 19: House Code and Unit Number

Default

0 0 0 _ _ _

221 Automation Item 19: Miscellaneous Options

Default		Option	ON	OFF
☐ OFF	☐	01	Automation Item enabled	Automation Item disabled
☐ ON	☐	02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐	04	Dimming Enabled	Dimming Disabled
☐ OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐	06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

222 Automation Item 19: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

223 Automation Item 19: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

224 Automation Item 19: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

225 Automation Item 20: House Code and Unit Number

Default

0 0 0 _ _ _

226 Automation Item 20: Miscellaneous Options

Default		Option	ON	OFF
☐ OFF	☐	01	Automation Item enabled	Automation Item disabled
☐ ON	☐	02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐	04	Dimming Enabled	Dimming Disabled
☐ OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐	06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

227 Automation Item 20: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

228 Automation Item 20: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

229 Automation Item 20: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

230 Automation Item 21: House Code and Unit Number

Default

0 0 0

231 Automation Item 21: Miscellaneous Options

Default	Option	ON	OFF
☐ OFF	☐ 01	Automation Item enabled	Automation Item disabled
☐ ON	☐ 02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐ 03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐ 04	Dimming Enabled	Dimming Disabled
☐ OFF	☐ 05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐ 06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐ 07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐ 08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐ 09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

232 Automation Item 21: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

233 Automation Item 21: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

234 Automation Item 21: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

235 Automation Item 22: House Code and Unit Number

Default

0 0 0 _ _ _

236 Automation Item 22: Miscellaneous Options

Default		Option	ON	OFF
☐ OFF	☐	01	Automation Item enabled	Automation Item disabled
☐ ON	☐	02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐	04	Dimming Enabled	Dimming Disabled
☐ OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐	06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

237 Automation Item 22: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

238 Automation Item 22: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

239 Automation Item 22: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

240 Automation Item 23: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

241 Automation Item 23: Miscellaneous Options

Default		Option	ON	OFF
☐ OFF	☐	01	Automation Item enabled	Automation Item disabled
☐ ON	☐	02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐	04	Dimming Enabled	Dimming Disabled
☐ OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐	06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.**242 Automation Item 23: Schedule Assignment**

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

243 Automation Item 23: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

244 Automation Item 23: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

245 Automation Item 24: House Code and Unit Number

Default

0 0 0

246 Automation Item 24: Miscellaneous Options

Default	Option	ON	OFF
☐ OFF	☐ 01	Automation Item enabled	Automation Item disabled
☐ ON	☐ 02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐ 03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐ 04	Dimming Enabled	Dimming Disabled
☐ OFF	☐ 05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐ 06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐ 07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐ 08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐ 09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

247 Automation Item 24: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

248 Automation Item 24: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

249 Automation Item 24: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

250 Automation Item 25: House Code and Unit Number

Default

0 0 0 _ _ _

251 Automation Item 25: Miscellaneous Options

Default		Option	ON	OFF
OFF	☐	01	Automation Item enabled	Automation Item disabled
ON	☐	02	User Controlled ON/OFF	Not user controlled
OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF	☐	04	Dimming Enabled	Dimming Disabled
OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON	☐	06	Item is ON steady when active	Item activates for programmed time
ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

252 Automation Item 25: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

253 Automation Item 25: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

254 Automation Item 25: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

255 Automation Item 26: House Code and Unit Number

Default

<table border="1"><tr><td>0</td><td>0</td><td>0</td></tr></table>	0	0	0	<table border="1"><tr><td> </td><td> </td><td> </td><td> </td><td> </td></tr></table>					
0	0	0							

256 Automation Item 26: Miscellaneous Options

Default		Option	ON	OFF
OFF		01	Automation Item enabled	Automation Item disabled
ON		02	User Controlled ON/OFF	Not user controlled
OFF		03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF		04	Dimming Enabled	Dimming Disabled
OFF		05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON		06	Item is ON steady when active	Item activates for programmed time
ON		07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF		08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF		09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

257 Automation Item 26: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

258 Automation Item 26: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

259 Automation Item 26: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

<table border="1"><tr><td>0</td><td>0</td></tr></table>	0	0	<table border="1"><tr><td> </td><td> </td></tr></table>		
0	0				

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

260 Automation Item 27: House Code and Unit Number

Default

0 0 0

261 Automation Item 27: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

262 Automation Item 27: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

263 Automation Item 27: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

264 Automation Item 27: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

265 Automation Item 28: House Code and Unit Number

Default

0 0 0 _ _ _

266 Automation Item 28: Miscellaneous Options

Default	Option	ON	OFF
☐ OFF	01	Automation Item enabled	Automation Item disabled
☐ ON	02	User Controlled ON/OFF	Not user controlled
☐ OFF	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	04	Dimming Enabled	Dimming Disabled
☐ OFF	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	06	Item is ON steady when active	Item activates for programmed time
☐ ON	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

267 Automation Item 28: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

268 Automation Item 28: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

269 Automation Item 28: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

270 Automation Item 29: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

271 Automation Item 29: Miscellaneous Options

Default		Option	ON	OFF
OFF		01	Automation Item enabled	Automation Item disabled
ON		02	User Controlled ON/OFF	Not user controlled
OFF		03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
OFF		04	Dimming Enabled	Dimming Disabled
OFF		05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
ON		06	Item is ON steady when active	Item activates for programmed time
ON		07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
OFF		08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
OFF		09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

272 Automation Item 29: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

273 Automation Item 29: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

274 Automation Item 29: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

275 Automation Item 30: House Code and Unit Number

Default

0 0 0 _ _ _

276 Automation Item 30: Miscellaneous Options

Default		Option	ON	OFF
☐ OFF	☐	01	Automation Item enabled	Automation Item disabled
☐ ON	☐	02	User Controlled ON/OFF	Not user controlled
☐ OFF	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
☐ OFF	☐	04	Dimming Enabled	Dimming Disabled
☐ OFF	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
☐ ON	☐	06	Item is ON steady when active	Item activates for programmed time
☐ ON	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
☐ OFF	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
☐ OFF	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

277 Automation Item 30: Schedule Assignment

	Follows Schedule															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

278 Automation Item 30: Mode Assignment

	Follows Schedule							
	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	☐	☐	☐	☐	☐	☐	☐	☐

279 Automation Item 30: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0 _ _

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

280 Automation Item 31: House Code and Unit Number

Default

0 0 0

281 Automation Item 31: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	<u> </u>	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	<u> </u>	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	<u> </u>	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	<u> </u>	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	<u> </u>	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	<u> </u>	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	<u> </u>	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	<u> </u>	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	<u> </u>	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

282 Automation Item 31: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

283 Automation Item 31: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>

284 Automation Item 31: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0 0

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

285 Automation Item 32: House Code and Unit Number

Default

0	0	0			
---	---	---	--	--	--

286 Automation Item 32: Miscellaneous Options

Default		Option	ON	OFF
<u>OFF</u>	☐	01	Automation Item enabled	Automation Item disabled
<u>ON</u>	☐	02	User Controlled ON/OFF	Not user controlled
<u>OFF</u>	☐	03	Included in Global ON/OFF Command	Not included in Global ON/OFF Command
<u>OFF</u>	☐	04	Dimming Enabled	Dimming Disabled
<u>OFF</u>	☐	05	Follows Schedule ON/OFF Output Condition Always	Follows Schedule ON/OFF Output Condition only when Mode is ON
<u>ON</u>	☐	06	Item is ON steady when active	Item activates for programmed time
<u>ON</u>	☐	07	Item prompt: "ON/OFF"	Prompt is not "ON/OFF"
<u>OFF</u>	☐	08	Item prompt: "OPEN/CLOSED"	Prompt is not "OPEN/CLOSED"
<u>OFF</u>	☐	09	Item prompt: "Setback ON/Setback OFF"	Prompt is not "Setback ON/Setback OFF"

NOTE: Only ONE of Options 07, 08 or 09 may be selected.

287 Automation Item 32: Schedule Assignment

Follows Schedule

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

288 Automation Item 32: Mode Assignment

Follows Schedule

	1	2	3	4	5	6	7	8
Default	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

289 Automation Item 32: Timer / Output Condition

Enter one 2-digit number to determine how the Automation Item will operate.

Default

0	0		
---	---	--	--

Option	Operation
00	Manual user control only
01	Alarm System Output Only
02	Schedule Only
03	Schedule or Alarm System Output
04	Schedule and Alarm System Output

Automation Item Pulse Timers

301 Automation Item 1: Pulse Time

Default

0 0 5

302 Automation Item 2: Pulse Time

Default

0 0 5

303 Automation Item 3: Pulse Time

Default

0 0 5

304 Automation Item 4: Pulse Time

Default

0 0 5

305 Automation Item 5: Pulse Time

Default

0 0 5

306 Automation Item 6: Pulse Time

Default

0 0 5

307 Automation Item 7: Pulse Time

Default

0 0 5

308 Automation Item 8: Pulse Time

Default

0 0 5

309 Automation Item 9: Pulse Time

Default

0 0 5

310 Automation Item 10: Pulse Time

Default

0 0 5

311 Automation Item 11: Pulse Time

Default

0 0 5

312 Automation Item 12: Pulse Time

Default

0 0 5

313 Automation Item 13: Pulse Time

Default

0 0 5

314 Automation Item 14: Pulse Time

Default

0 0 5

315 Automation Item 15: Pulse Time

Default

0 0 5

316 Automation Item 16: Pulse Time

Default

0 0 5

317 Automation Item 17: Pulse Time

Default

0 0 5

318 Automation Item 18: Pulse Time

Default

0 0 5

319 Automation Item 19: Pulse Time

Default

0 0 5

320 Automation Item 20: Pulse Time

Default

0 0 5

321 Automation Item 21: Pulse Time

Default

0 0 5

322 Automation Item 22: Pulse Time

Default

0 0 5

323 Automation Item 23: Pulse Time

Default

0 0 5

324 Automation Item 24: Pulse Time

Default

0 0 5

325 Automation Item 25: Pulse Time

Default

0 0 5

326 Automation Item 26: Pulse Time

Default

0 0 5

327 Automation Item 27: Pulse Time

Default

0 0 5

328 Automation Item 28: Pulse Time

Default

0 0 5

329 Automation Item 29: Pulse Time

Default

0 0 5

330 Automation Item 30: Pulse Time

Default

0 0 5

331 Automation Item 31: Pulse Time

Default

0 0 5

332 Automation Item 32: Pulse Time

Default

0 0 5

Label Programming

451 Automation Item 1 Label

Codes

Label

452 Automation Item 2 Label

Codes

Label

453 Automation Item 3 Label

Codes

Label

454 Automation Item 4 Label

Codes

Label

455 Automation Item 5 Label

Codes

Label

456 Automation Item 6 Label

Codes

Label

457 Automation Item 7 Label

Codes

Label

458 Automation Item 8 Label

Codes

Label

459 Automation Item 9 Label

Codes

Label

460 Automation Item 10 Label

Codes

Label

461 Automation Item 11 Label

Codes

Label

462 Automation Item 12 Label

Codes

Label

463 Automation Item 13 Label

Codes

Label

464 Automation Item 14 Label

Codes

Label _____

465 Automation Item 15 Label

Codes

Label _____

466 Automation Item 16 Label

Codes

Label

467 Automation Item 17 Label

Codes

Label

468 Automation Item 18 Label

Codes

Label

469 Automation Item 19 Label

Codes

Label

470 Automation Item 20 Label

Codes

Label

471 Automation Item 21 Label

Codes

Label

472 Automation Item 22 Label

Codes

Label

473 Automation Item 23 Label

Codes

Label

474 Automation Item 24 Label

Codes

Label

475 Automation Item 25 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

476 Automation Item 26 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

477 Automation Item 27 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

478 Automation Item 28 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

479 Automation Item 29 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

480 Automation Item 30 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

481 Automation Item 31 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

482 Automation Item 32 LabelCodes

--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--

521 Automation Mode 1 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

522 Automation Mode 2 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

523 Automation Mode 3 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

524 Automation Mode 4 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

525 Automation Mode 5 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

526 Automation Mode 6 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

527 Automation Mode 7 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

528 Automation Mode 8 LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

545 Sensor Reset LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

546 Door Strike LabelCodes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label


--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Codes _____

Label

562 Partition 2 Label

Codes

Label 

563 Partition 3 Label

Codes

--	--	--	--


--	--	--	--	--

--	--	--	--	--	--

--	--	--	--	--	--	--	--

Label _____

564 Partition 4 Label

Codes 

Label

565 Partition 5 Label

Codes

Label

566 Partition 6 Label

Codes

Label _____

567 Partition 7 Label

Codes

Label

568 Partition 8 Label

Codes

Label

601 Zone Label: Zone 1

Codes

Label

602 Zone Label: Zone 2

Codes

Label

603 Zone Label: Zone 3

Codes

Label

604 Zone Label: Zone 4

Codes

Label

605 Zone Label: Zone 5

Codes

Label

606 Zone Label: Zone 6

Codes

Label

607 Zone Label: Zone 7

Codes

Label

608 Zone Label: Zone 8

Codes

Label

609 Zone Label: Zone 9

Codes

Label

610 Zone Label: Zone 10

Codes

Label

611 Zone Label: Zone 11

Codes

Label

612 Zone Label: Zone 12

Codes

Label

613 Zone Label: Zone 13Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

614 Zone Label: Zone 14Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

615 Zone Label: Zone 15Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

616 Zone Label: Zone 16Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

617 Zone Label: Zone 17Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

618 Zone Label: Zone 18Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

619 Zone Label: Zone 19Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

620 Zone Label: Zone 20Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

621 Zone Label: Zone 21Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

622 Zone Label: Zone 22Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

623 Zone Label: Zone 23Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

624 Zone Label: Zone 24Codes

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Label

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

625 Zone Label: Zone 25Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

626 Zone Label: Zone 26Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

627 Zone Label: Zone 27Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

628 Zone Label: Zone 28Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

629 Zone Label: Zone 29Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

630 Zone Label: Zone 30Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

631 Zone Label: Zone 31Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

632 Zone Label: Zone 32Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

633 Zone Label: Zone 33Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

634 Zone Label: Zone 34Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

635 Zone Label: Zone 35Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

636 Zone Label: Zone 36Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

637 Zone Label: Zone 37Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

638 Zone Label: Zone 38Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

639 Zone Label: Zone 39Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

640 Zone Label: Zone 40Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

641 Zone Label: Zone 41Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

642 Zone Label: Zone 42Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

643 Zone Label: Zone 43Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

644 Zone Label: Zone 44Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

645 Zone Label: Zone 45Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

646 Zone Label: Zone 46Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

647 Zone Label: Zone 47Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

648 Zone Label: Zone 48Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

649 Zone Label: Zone 49

Codes

Label

650 Zone Label: Zone 50

Codes

Label

651 Zone Label: Zone 51

Codes

Label

652 Zone Label: Zone 52

Codes

Label

653 Zone Label: Zone 53

Codes

Label

654 Zone Label: Zone 54

Codes

Label

655 Zone Label: Zone 55

Codes

Label

656 Zone Label: Zone 56

Codes

Label

657 Zone Label: Zone 57

Codes

Label

658 Zone Label: Zone 58

Codes

Label

659 Zone Label: Zone 59

Codes

Label

660 Zone Label: Zone 60

Codes

Label

661 Zone Label: Zone 61Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

662 Zone Label: Zone 62Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

663 Zone Label: Zone 63Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

664 Zone Label: Zone 64Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

665 Zone Label: Zone 65Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

666 Zone Label: Zone 66Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

667 Zone Label: Zone 67Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

668 Zone Label: Zone 68Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

669 Zone Label: Zone 69Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

670 Zone Label: Zone 70Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

671 Zone Label: Zone 71Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

672 Zone Label: Zone 72Codes


--	--	--	--	--	--

Label

--	--	--	--	--	--

673 Zone Label: Zone 73

Codes

Label 

674 Zone Label: Zone 74

Codes

Label


675 Zone Label: Zone 75

Codes

Label

676 Zone Label: Zone 76

Codes

Label 

677 Zone Label: Zone 76

Codes _____

Label

678 Zone Label: Zone 78

Codes

Label _____

679 Zone Label: Zone 79

Codes

Label

680 Zone Label: Zone 80

Codes

Label

681 Zone Label: Zone 81

Codes

Label

682 Zone Label: Zone 82

Codes

Label _____

683 Zone Label: Zone 83

Codes

--	--	--	--

--	--	--	--

--	--	--	--

 |

Label

684 Zone Label: Zone 84

Codes

Label	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

685 Zone Label: Zone 85

Codes

Label	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100

686 Zone Label: Zone 86

Codes _____

Label

687 Zone Label: Zone 87

Codes

Label					
-------	--	--	--	--	--

688 Zone Label: Zone 88

Codes _____

Label

689 Zone Label: Zone 89

Codes

Label

690 Zone Label: Zone 90

Codes _____

Label						
-------	--	--	--	--	--	--

691 Zone Label: Zone 91

Codes

Label _____

692 Zone Label: Zone 92

Codes

Label

693 Zone Label: Zone 93

Codes

Label

694 Zone Label: Zone 94

Codes

Label _____

695 Zone Label: Zone 95

Codes

Label

696 Zone Label: Zone 96

Codes

Label

697 Zone Label: Zone 97Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

698 Zone Label: Zone 98Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

699 Zone Label: Zone 99Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

700 Zone Label: Zone 100Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

701 Zone Label: Zone 101Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

702 Zone Label: Zone 102Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

703 Zone Label: Zone 103Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

704 Zone Label: Zone 104Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

705 Zone Label: Zone 105Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

706 Zone Label: Zone 106Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

707 Zone Label: Zone 107Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

708 Zone Label: Zone 108Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

709 Zone Label: Zone 109Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

710 Zone Label: Zone 110Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

711 Zone Label: Zone 111Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

712 Zone Label: Zone 112Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

713 Zone Label: Zone 113Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

714 Zone Label: Zone 114Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

715 Zone Label: Zone 115Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

716 Zone Label: Zone 116Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

717 Zone Label: Zone 117Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

718 Zone Label: Zone 118Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

719 Zone Label: Zone 119Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

720 Zone Label: Zone 120Codes

--	--	--	--	--	--

Label

--	--	--	--	--	--

721 Zone Label: Zone 121

Codes

Label

722 Zone Label: Zone 122

Codes

Label

723 Zone Label: Zone 123

Codes

Label

724 Zone Label: Zone 124

Codes

Label

725 Zone Label: Zone 125

Codes

Label

726 Zone Label: Zone 126

Codes

Label

727 Zone Label: Zone 127

Codes

Label

728 Zone Label: Zone 128

Codes

Label

Appendix 1: X-10 House Code and Unit Numbers

<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>	<i>Enter</i>	<i>X-10 Code</i>
[000]	A 1	[052]	D 5	[104]	G 9	[156]	J 13	[208]	N 1
[001]	A 2	[053]	D 6	[105]	G 10	[157]	J 14	[209]	N 2
[002]	A 3	[054]	D 7	[106]	G 11	[158]	J 15	[210]	N 3
[003]	A 4	[055]	D 8	[107]	G 12	[159]	J 16	[211]	N 4
[004]	A 5	[056]	D 9	[108]	G 13	[160]	K 1	[212]	N 5
[005]	A 6	[057]	D 10	[109]	G 14	[161]	K 2	[213]	N 6
[006]	A 7	[058]	D 11	[110]	G 15	[162]	K 3	[214]	N 7
[007]	A 8	[059]	D 12	[111]	G 16	[163]	K 4	[215]	N 8
[008]	A 9	[060]	D 13	[112]	H 1	[164]	K 5	[216]	N 9
[009]	A 10	[061]	D 14	[113]	H 2	[165]	K 6	[217]	N 10
[010]	A 11	[062]	D 15	[114]	H 3	[166]	K 7	[218]	N 11
[011]	A 12	[063]	D 16	[115]	H 4	[167]	K 8	[219]	N 12
[012]	A 13	[064]	E 1	[116]	H 5	[168]	K 9	[220]	N 13
[013]	A 14	[065]	E 2	[117]	H 6	[169]	K 10	[221]	N 14
[014]	A 15	[066]	E 3	[118]	H 7	[170]	K 11	[222]	N 15
[015]	A 16	[067]	E 4	[119]	H 8	[171]	K 12	[223]	N 16
[016]	B 1	[068]	E 5	[120]	H 9	[172]	K 13	[224]	O 1
[017]	B 2	[069]	E 6	[121]	H 10	[173]	K 14	[225]	O 2
[018]	B 3	[070]	E 7	[122]	H 11	[174]	K 15	[226]	O 3
[019]	B 4	[071]	E 8	[123]	H 12	[175]	K 16	[227]	O 4
[020]	B 5	[072]	E 9	[124]	H 13	[176]	L 1	[228]	O 5
[021]	B 6	[073]	E 10	[125]	H 14	[177]	L 2	[229]	O 6
[022]	B 7	[074]	E 11	[126]	H 15	[178]	L 3	[230]	O 7
[023]	B 8	[075]	E 12	[127]	H 16	[179]	L 4	[231]	O 8
[024]	B 9	[076]	E 13	[128]	I 1	[180]	L 5	[232]	O 9
[025]	B 10	[077]	E 14	[129]	I 2	[181]	L 6	[233]	O 10
[026]	B 11	[078]	E 15	[130]	I 3	[182]	L 7	[234]	O 11
[027]	B 12	[079]	E 16	[131]	I 4	[183]	L 8	[235]	O 12
[028]	B 13	[080]	F 1	[132]	I 5	[184]	L 9	[236]	O 13
[029]	B 14	[081]	F 2	[133]	I 6	[185]	L 10	[237]	O 14
[030]	B 15	[082]	F 3	[134]	I 7	[186]	L 11	[238]	O 15
[031]	B 16	[083]	F 4	[135]	I 8	[187]	L 12	[239]	O 16
[032]	C 1	[084]	F 5	[136]	I 9	[188]	L 13	[240]	P 1
[033]	C 2	[085]	F 6	[137]	I 10	[189]	L 14	[241]	P 2
[034]	C 3	[086]	F 7	[138]	I 11	[190]	L 15	[242]	P 3
[035]	C 4	[087]	F 8	[139]	I 12	[191]	L 16	[243]	P 4
[036]	C 5	[088]	F 9	[140]	I 13	[192]	M 1	[244]	P 5
[037]	C 6	[089]	F 10	[141]	I 14	[193]	M 2	[245]	P 6
[038]	C 7	[090]	F 11	[142]	I 15	[194]	M 3	[246]	P 7
[039]	C 8	[091]	F 12	[143]	I 16	[195]	M 4	[247]	P 8
[040]	C 9	[092]	F 13	[144]	J 1	[196]	M 5	[248]	P 9
[041]	C 10	[093]	F 14	[145]	J 2	[197]	M 6	[249]	P 10
[042]	C 11	[094]	F 15	[146]	J 3	[198]	M 7	[250]	P 11
[043]	C 12	[095]	F 16	[147]	J 4	[199]	M 8	[251]	P 12
[044]	C 13	[096]	G 1	[148]	J 5	[200]	M 9	[252]	P 13
[045]	C 14	[097]	G 2	[149]	J 6	[201]	M 10	[253]	P 14
[046]	C 15	[098]	G 3	[150]	J 7	[202]	M 11	[254]	P 15
[047]	C 16	[099]	G 4	[151]	J 8	[203]	M 12	[255]	P 16
[048]	D 1	[100]	G 5	[152]	J 9	[204]	M 13		
[049]	D 2	[101]	G 6	[153]	J 10	[205]	M 14		
[050]	D 3	[102]	G 7	[154]	J 11	[206]	M 15		
[051]	D 4	[103]	G 8	[155]	J 12	[207]	M 16		

Appendix 2: Word Library

[000] Number Command 1: Combined Form

[001] Number Command 2: Ordered Form

[002] Number Command 3: Individual Numbers

[003] Access	[052] Dark	[101] Ground	[150] Mode	[199] Silent
[004] Air-conditioning	[053] Day	[102] Guard	[151] Motion	[200] Skylight
[005] Alcove	[054] Deck	[103] Guest	[152] Night	[201] Sliding
[006] And	[055] Degrees	[104] Gun	[153] North	[202] Smoke
[007] Apartment	[056] Den	[105] Gym	[154] Number	[203] Solarium
[008] Appliance	[057] Detector	[106] Hallway	[155] Nursery	[204] Sounder
[009] Area	[058] Dining	[107] Heat	[156] Office	[205] South
[010] Atrium	[059] Dishwasher	[108] Heater	[157] Outlet	[206] Sprinkler
[011] Attic	[060] Door	[109] High	[158] Over	[207] Staff
[012] Automatic	[061] Down	[110] Holiday	[159] Overflow	[208] Stairs
[013] Away	[062] Driveway	[111] Home	[160] Overhead	[209] Stereo
[014] Back	[063] East	[112] Hose	[161] Panel	[210] Stock
[015] Backyard	[064] Electric	[113] Hot tub	[162] Panic-button	[211] Storage
[016] Balcony	[065] Elevator	[114] House	[163] Parking	[212] Strike
[017] Bar	[066] Employee	[115] Humidity	[164] Partition	[213] Sump
[018] Barn	[067] Energy-save	[116] Interior	[165] Patio	[214] Supervision
[019] Basement	[068] Entertainment	[117] intrusion	[166] Perimeter	[215] Swimming-pool
[020] Bathroom	[069] Entry	[118] Item	[167] Photocopier	[216] Tamper
[021] Bay	[070] Equipment	[119] Jewelry	[168] Picture	[217] Television
[022] Beam	[071] Exercise	[120] Kitchen	[169] Place	[218] Temperature
[023] Bedroom	[072] Exhaust	[121] Laboratory	[170] Play	[219] Time
[024] Blinds	[073] Exit	[122] Ladies	[171] Porch	[220] Tool
[025] Boat	[074] Exterior	[123] Lamp	[172] Portable	[221] Top
[026] Boiler	[075] Extinguisher	[124] Landscape	[173] Power	[222] Track
[027] Bottom	[076] Factory	[125] Laundry	[174] Pressure	[223] Trap
[028] Boys	[077] Family	[126] Lawn	[175] Proximity	[224] Under
[029] Building	[078] Fan	[127] Left	[176] Pull-station	[225] Unit
[030] Cabinet	[079] Fence	[128] Level	[177] Pump	[226] Up
[031] Cafeteria	[080] File	[129] Library	[178] Ramp	[227] Upper
[032] Camera	[081] Fire	[130] Light	[179] Rear	[228] Utility
[033] Carport	[082] Floor	[131] Lights	[180] Receiving	[229] Vacuum
[034] Cash	[083] Florida	[132] Liquor	[181] Recreation	[230] Vault
[035] Ceiling	[084] Flow	[133] Living	[182] Refrigerator	[231] Vent
[036] Center	[085] Fluid	[134] Loading	[183] Reset	[232] Vibration
[037] Changeroom	[086] Foil	[135] Lobby	[184] Restricted	[233] Walkway
[038] China	[087] Fountain	[136] Lot	[185] Restroom	[234] Warehouse
[039] Chute	[088] Foyer	[137] Low	[186] Right	[235] Washroom
[040] Circuit	[089] Freezer	[138] Lower	[187] Roof	[236] Water
[041] Classroom	[090] French	[139] Machine	[188] Room	[237] Weekend
[042] Coatroom	[091] Front	[140] Maids	[189] Safe	[238] Well
[043] Coffee-maker	[092] Furnace	[141] Mail	[190] Sauna	[239] West
[044] Cold	[093] Game	[142] Main	[191] Schedule	[240] Window
[045] Collection	[094] Garage	[143] Maintenance	[192] Sensor	[241] Wine-cellar
[046] Compressor	[095] Garbage	[144] Master	[193] Service	[242] Work
[047] Computer	[096] Gas	[145] Mat	[194] Shed	[243] Yard
[048] Contact	[097] Gate	[146] Medical	[195] Shipping	[244] Zone
[049] Control	[098] Girls	[147] Meeting	[196] Shop	[245] (2 s Pause)
[050] Crawl-space	[099] Glassbreak	[148] Men's	[197] Shutter	
[051] Curtain	[100] Greenhouse	[149] Middle	[198] Side	